




W2053-L049



Material :


- Die-cast aluminum driver & LED housing
- Die-cast aluminum swivel joint
- Polycarbonate adapter with copper conductor



GENERAL SPECIFICATION

Light Source	lumileds LED		
Color Temperature	3000K/4000K/5700K		
CCT	2700	3000/3500	4000
Luminous Flux*	1000	1100	1170
Efficiency(LPW)	66	73	78
CRI Options	80 / 90		
Color Binning	3 Step		
Beam Angle(3000K/80CRI)	22°	30°	
CBCP(3000K/80CRI)	5270	3030	
UGR	N/A		
Power Consumption	15W		
Input Voltage	120V		
Input Current	0.14A		
Frequency	60Hz		
Power Factor	>0.9		
THD	<20%		
Dimming	TRIAC		
Weight	456g		
Certification	cETLus		
Adapter	J-Type, H-Type, L-Type, G-Type, P-Type		
Available Finish	Black, White, Silver		
Accessories	N/A		

LIGHT DISTRIBUTION

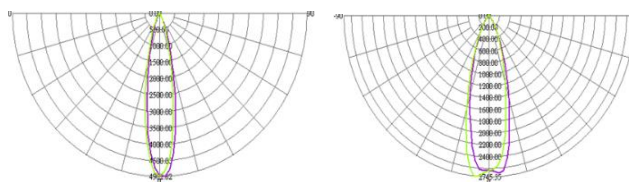

Luminous Flux*: Lumen and CBCP output varies based on Wattage, CCT and CRI. Table below is based on 80 CRI fixture. To estimate lumen and CBCP output of other combinations, multiply photometric data by factors as right column.

2700K/90CRI	3000K/90CRI	4000K/90CRI
0.9	0.95	1

ORDER CODE

Example: W2053-L049-J-L2700-80-AC-BK

Track Fixture	Adapter	LED	CCT	Beam	CRI	Dimming	Finish
W2053-L049	J Juno	L lumileds	27 2700K	00 Adjust	80 Min.80	AC TE/LE	WH White
	H Halo		30 3000K		90 Min.90	Blank Non	BK Black
	L Lightolier		35 3500K				SL Silver
	P Panasonic		40 4000K				
	G GES66						